



1051366-011802


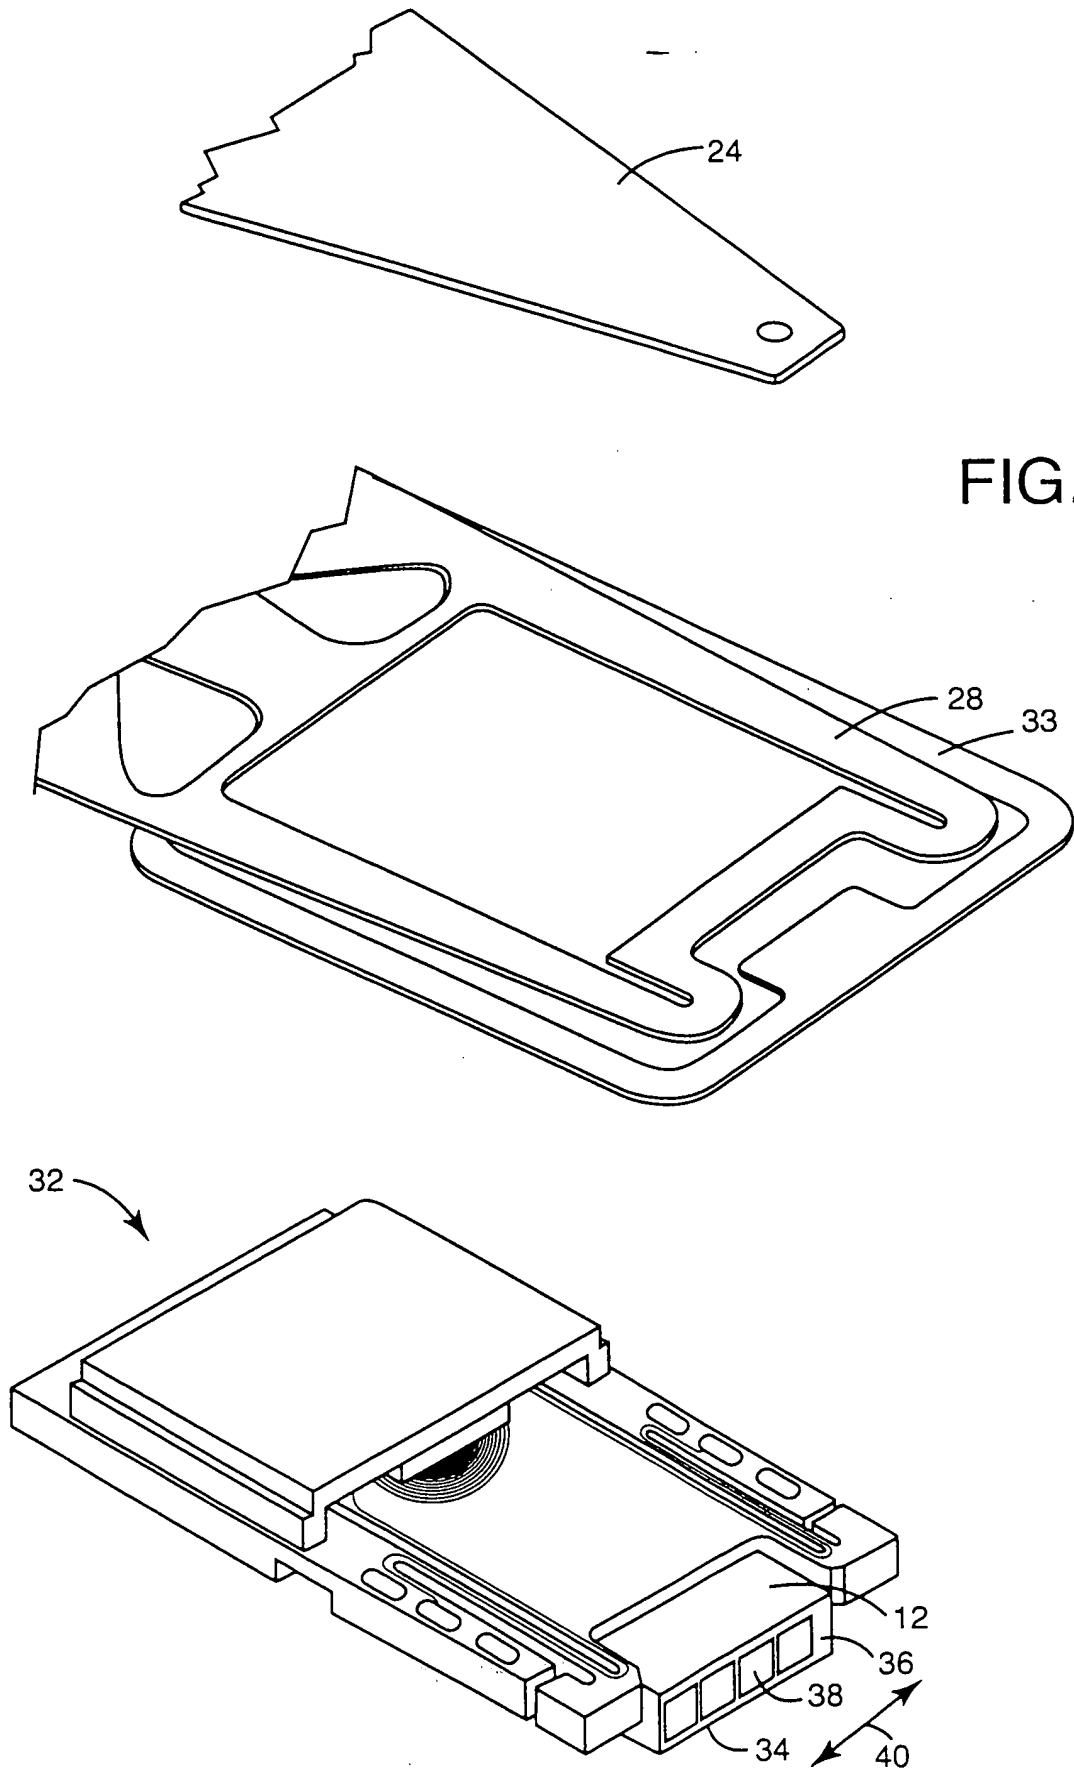


FIG. 3

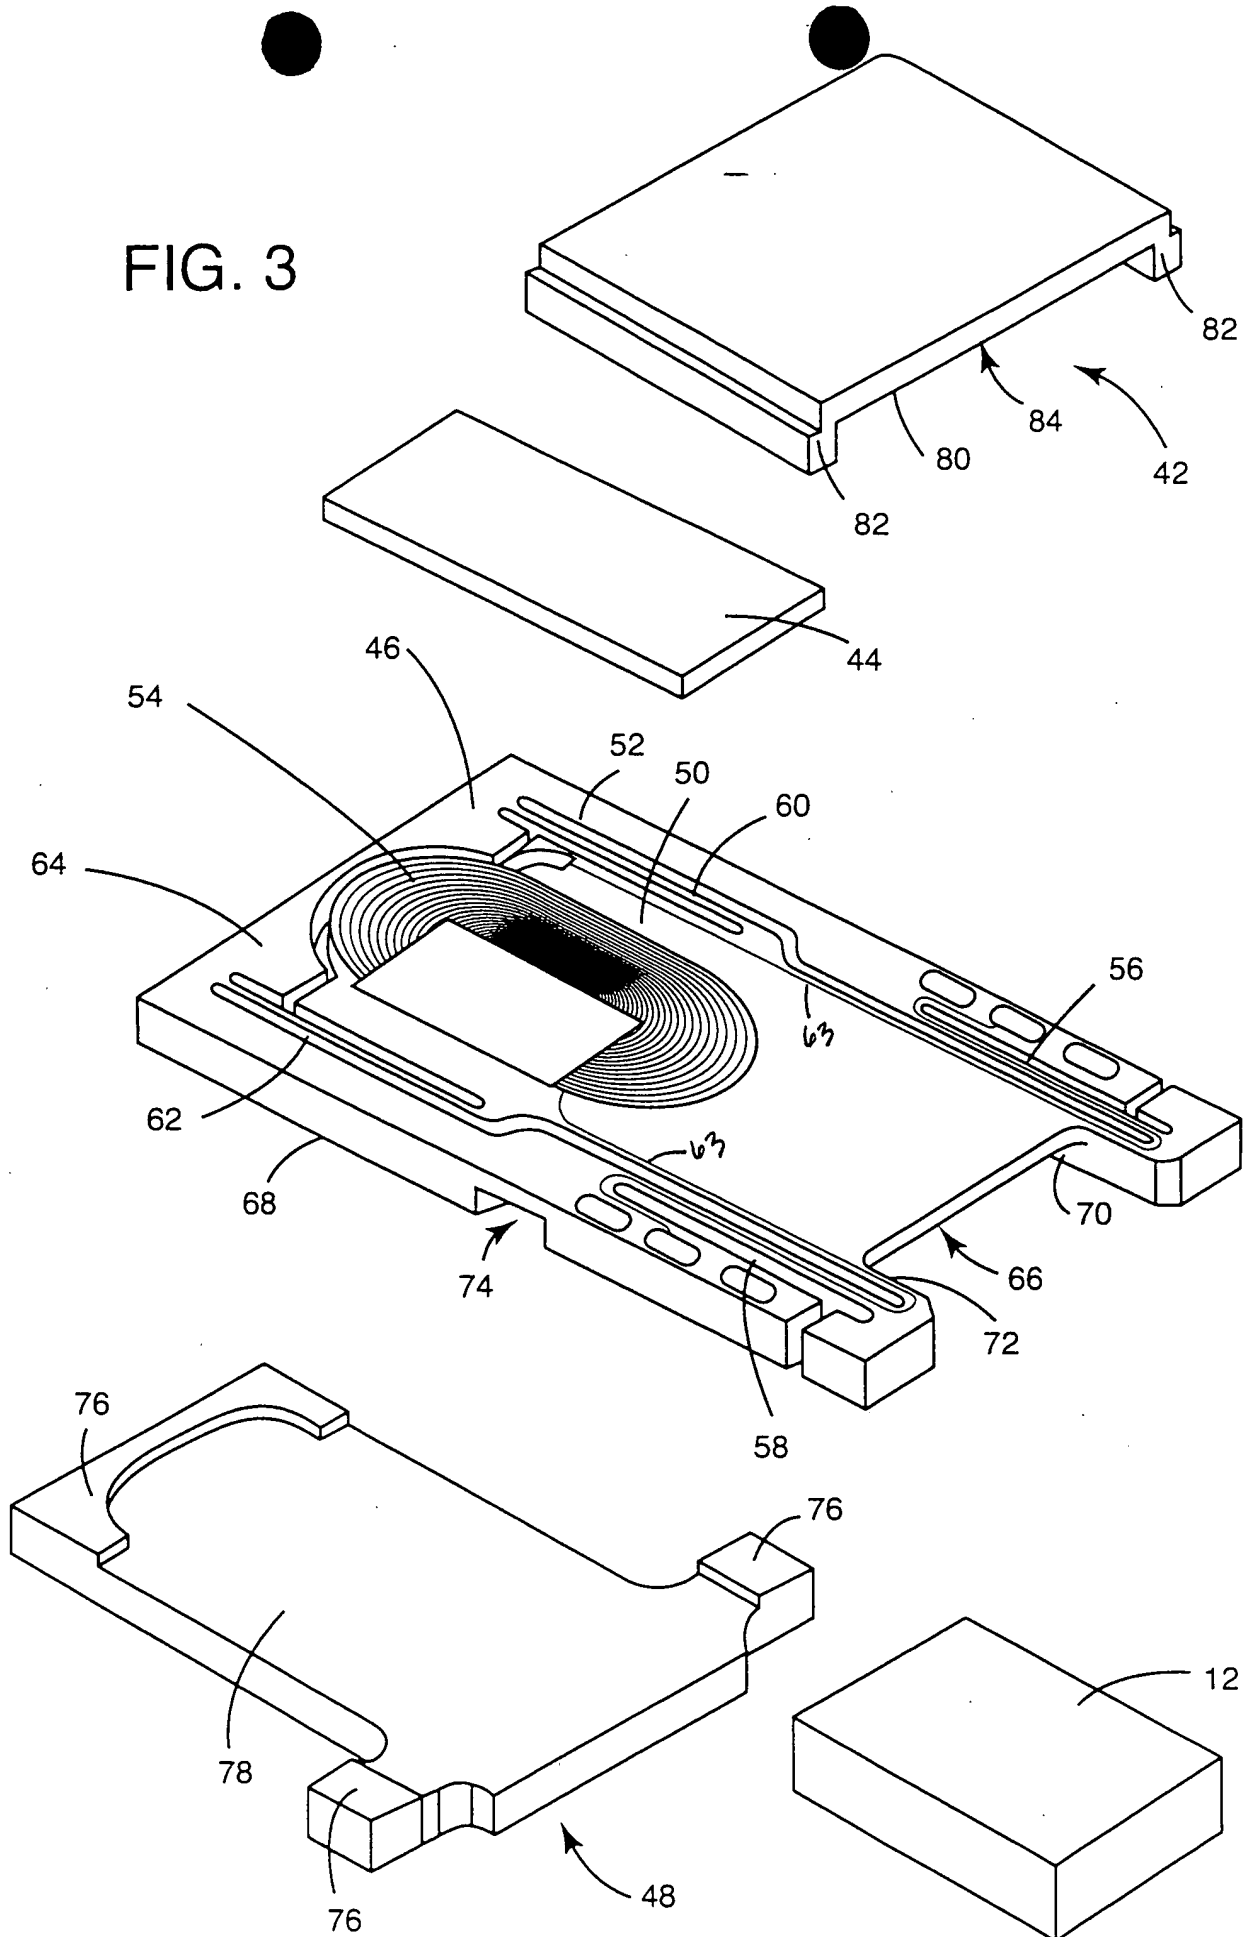

1051366-01B02

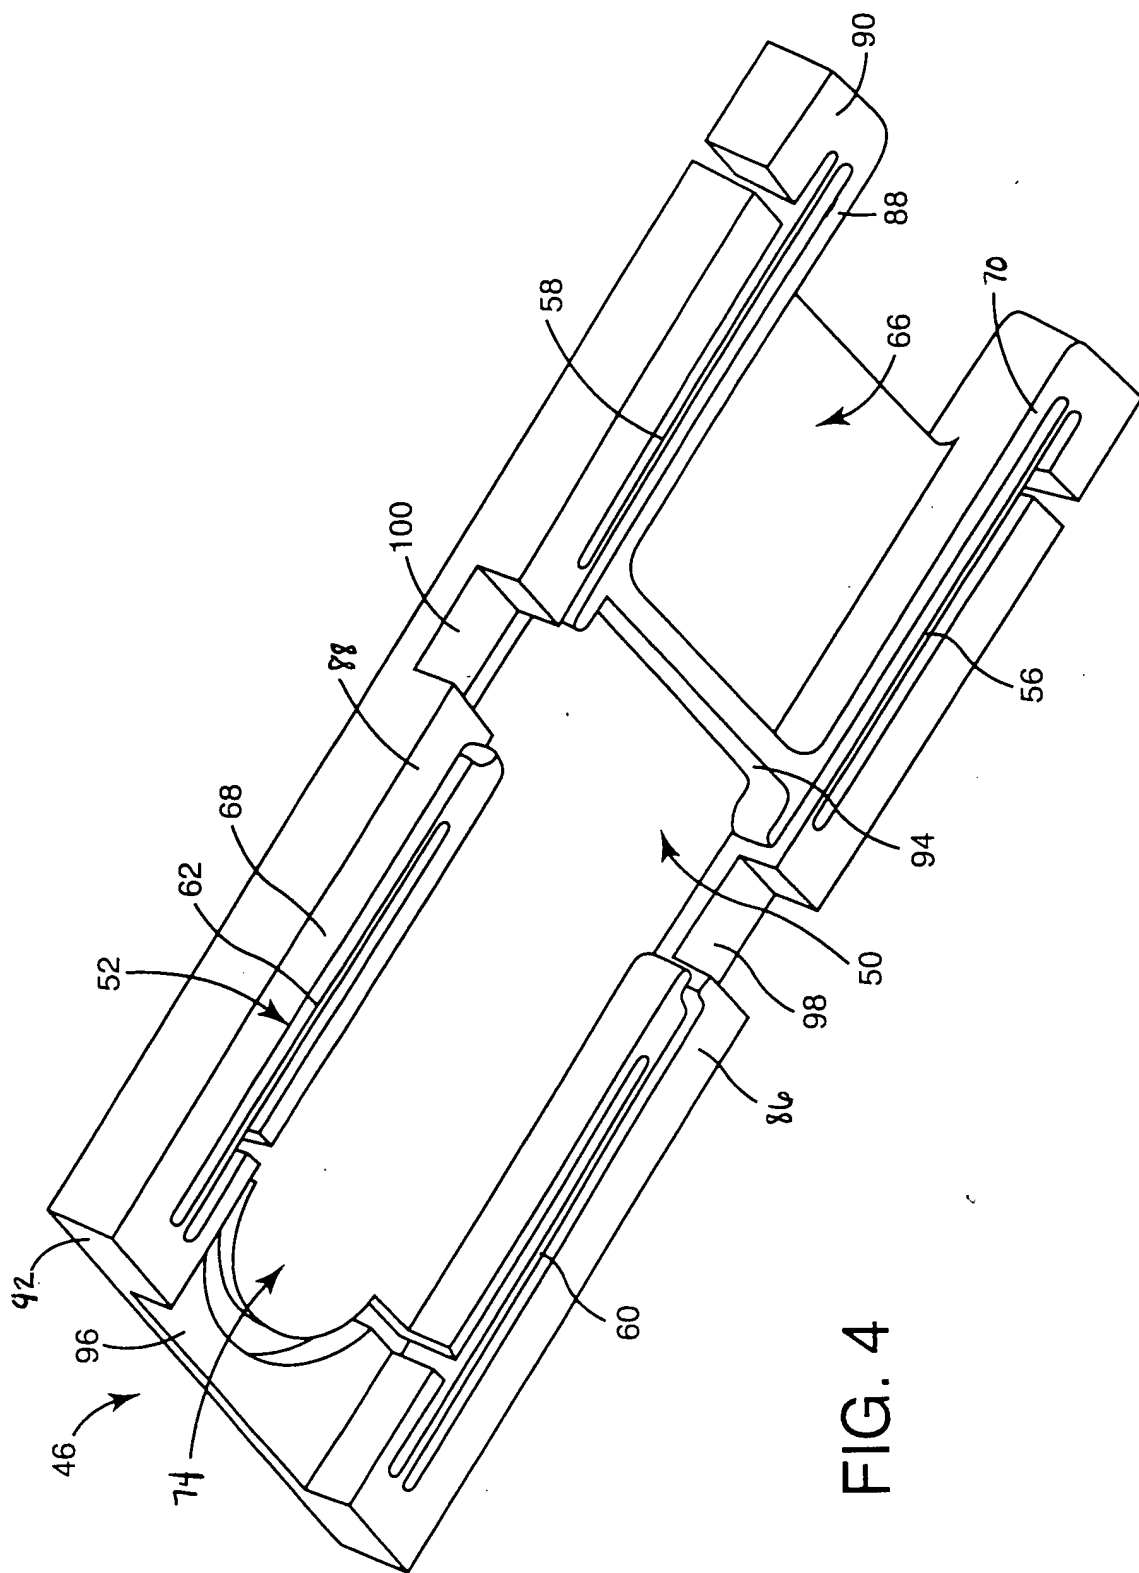


FIG. 4

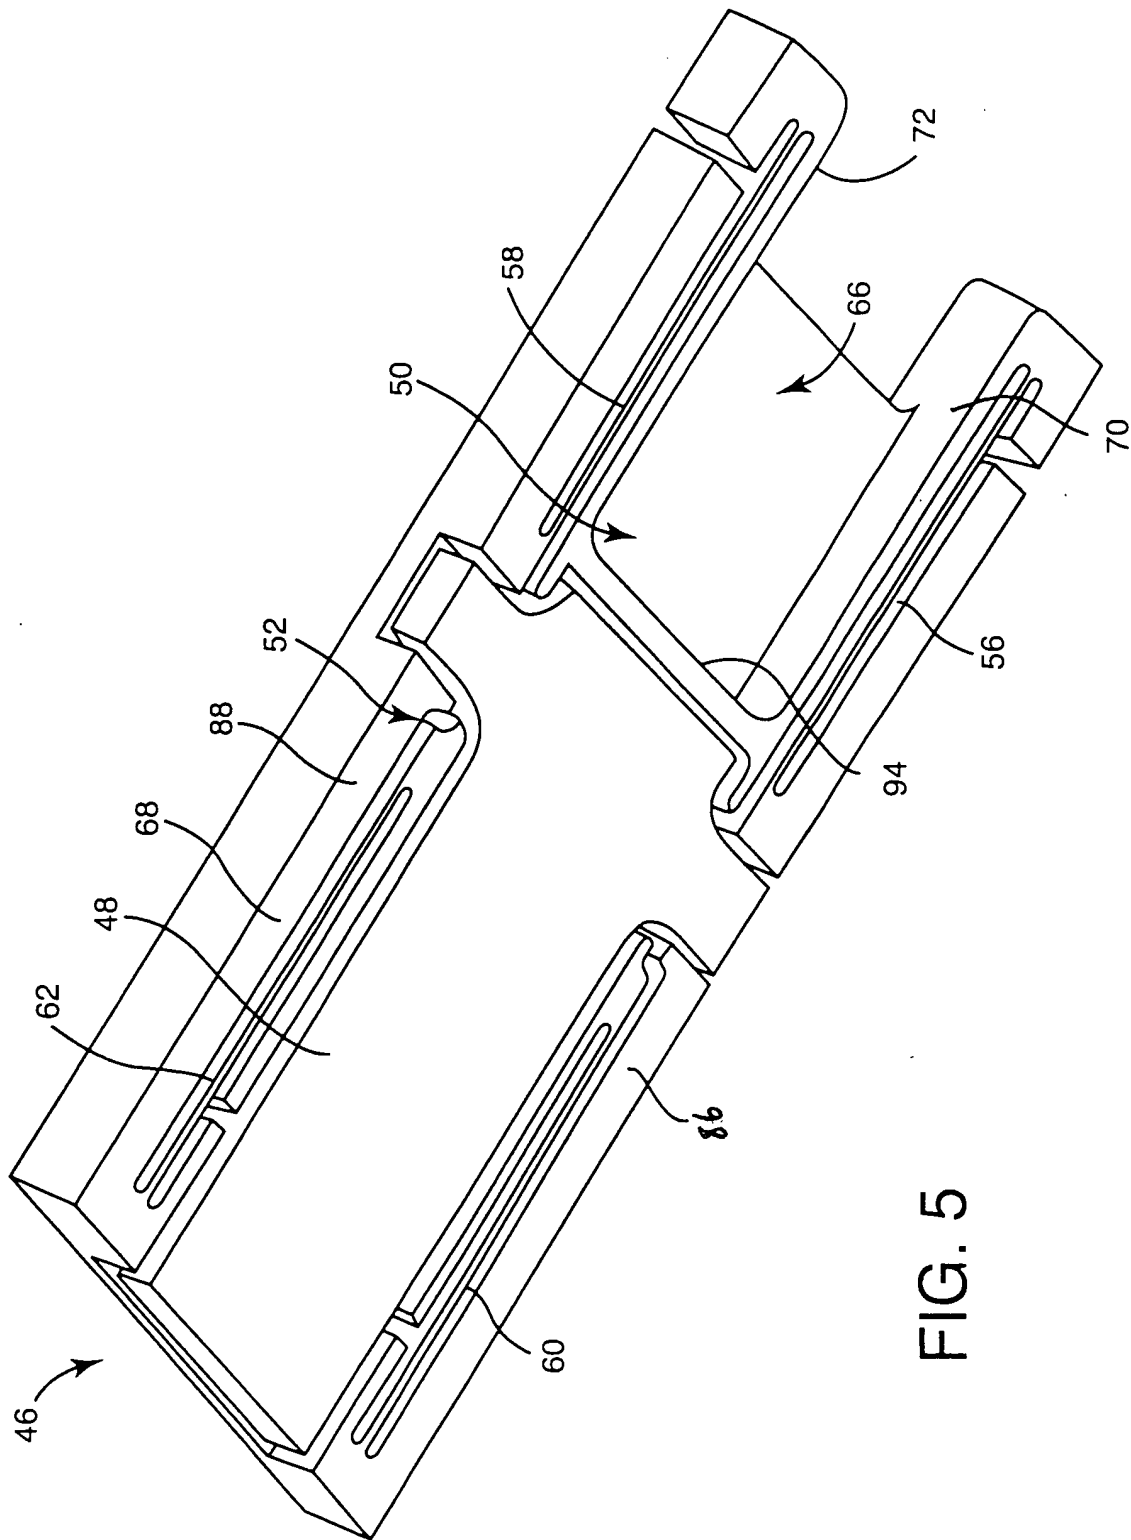


FIG. 5

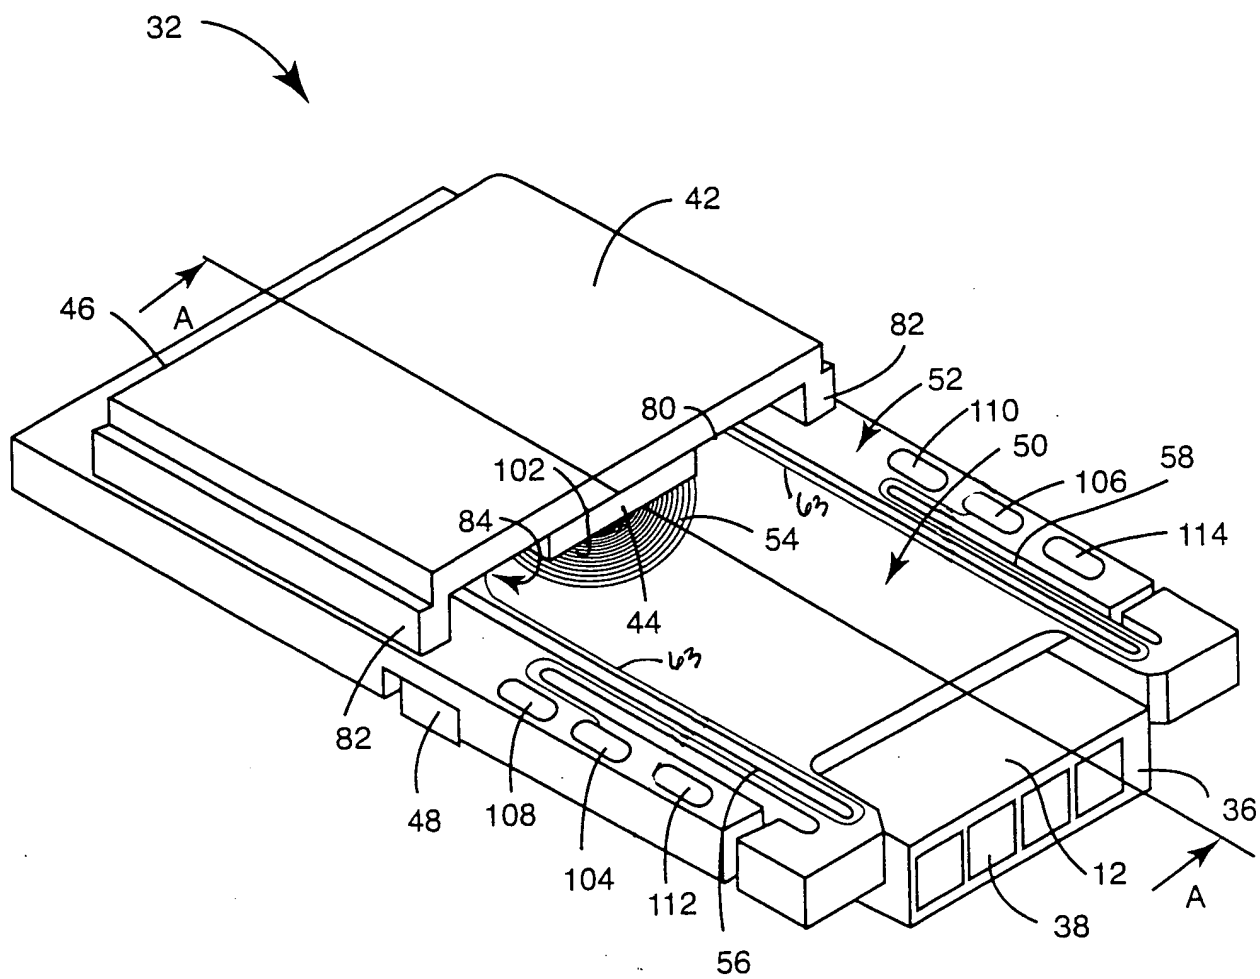


FIG. 6

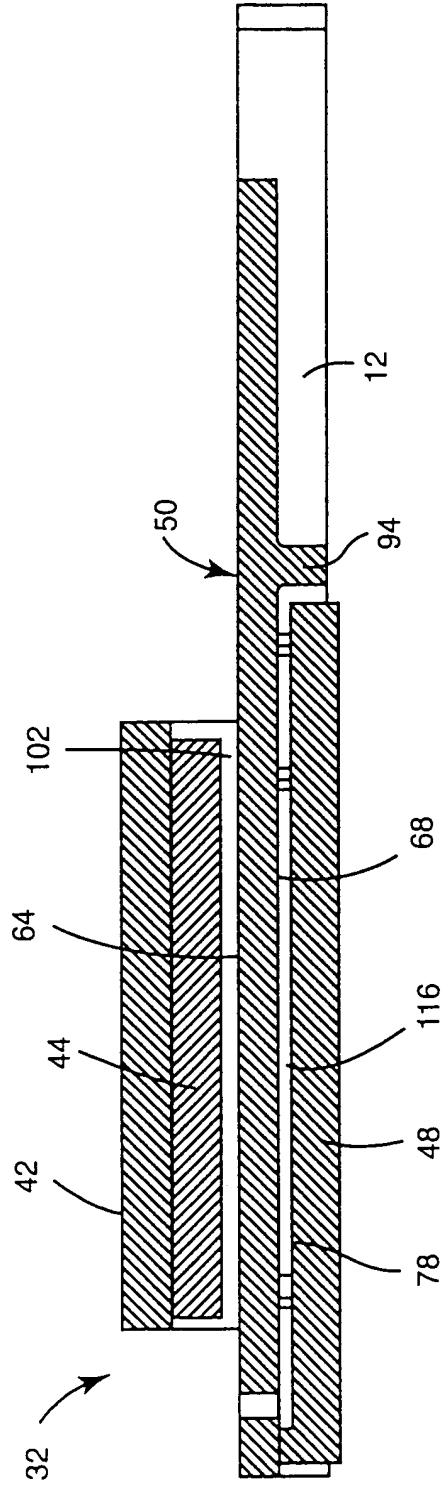


FIG. 7

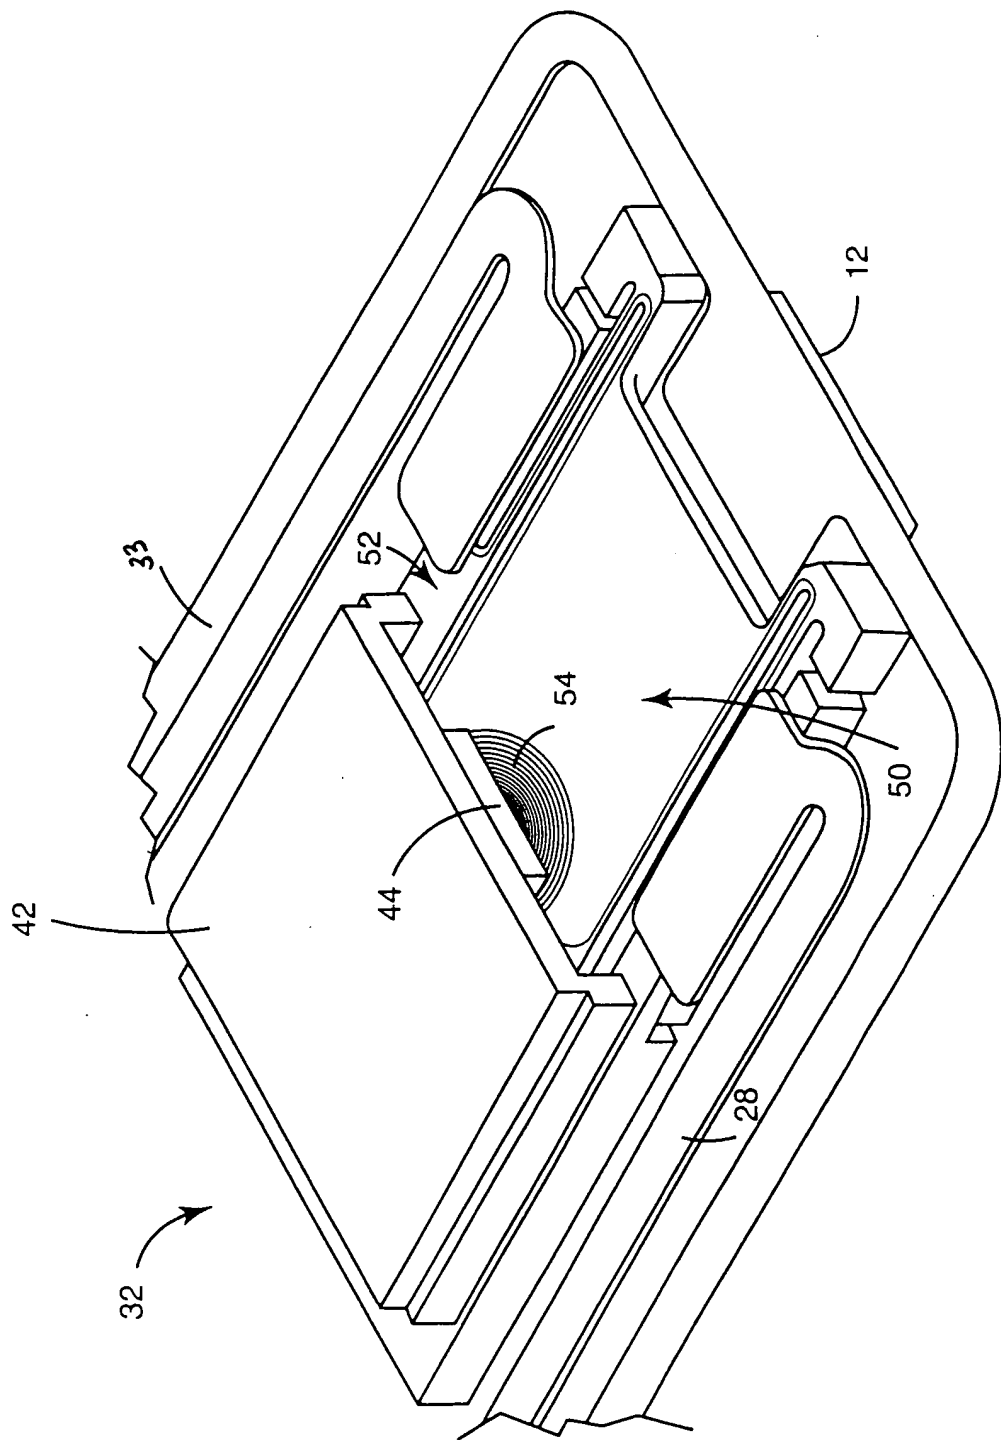


FIG. 8



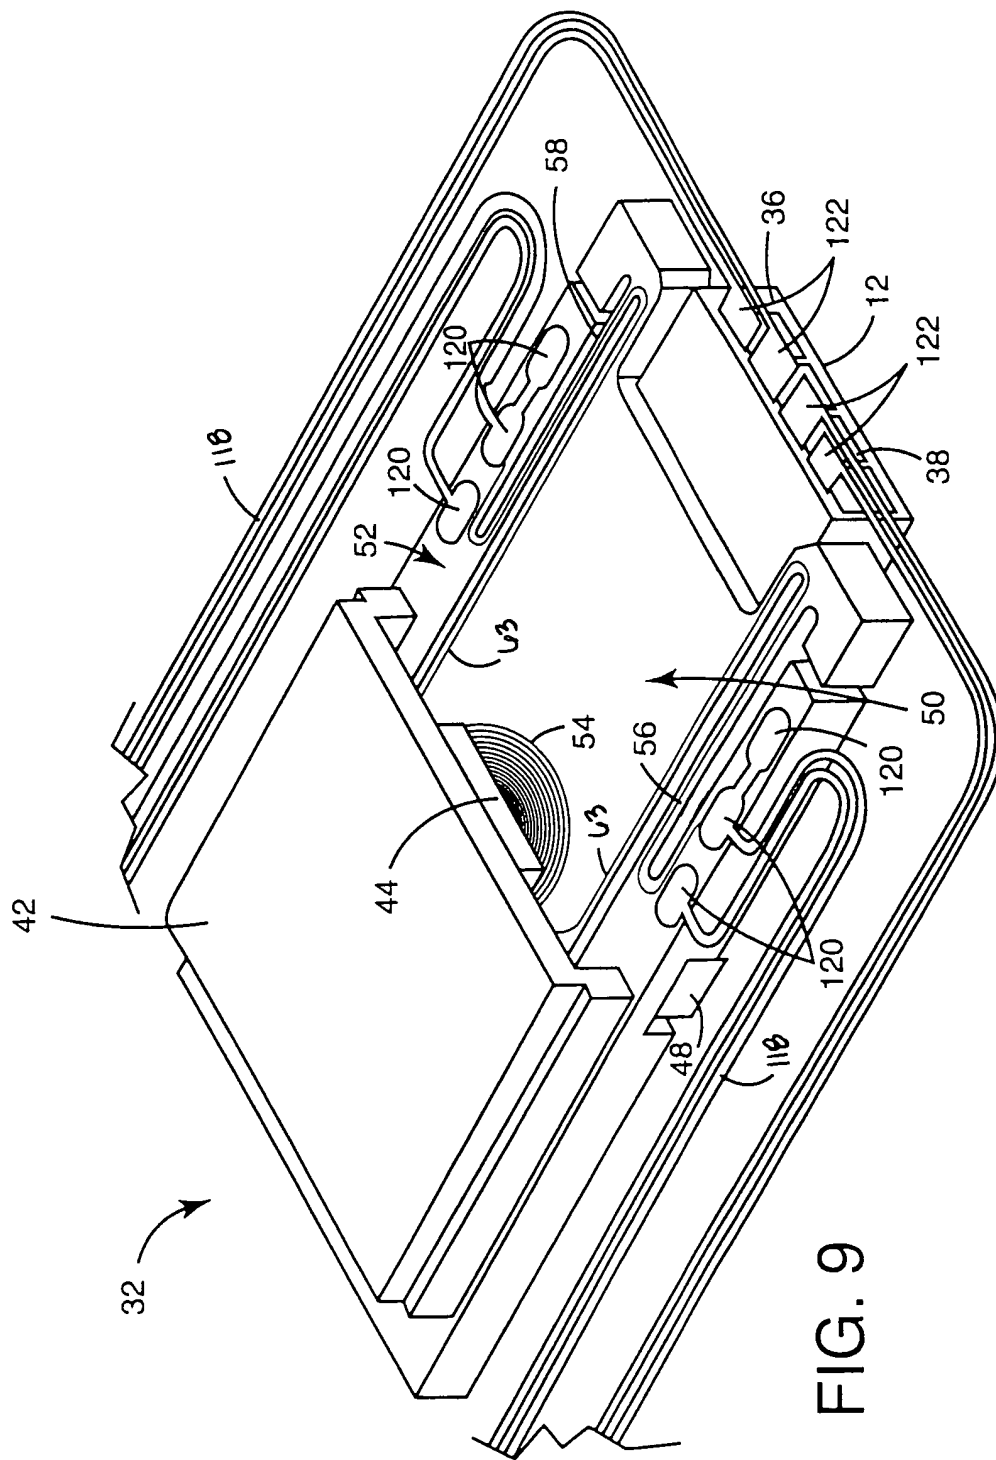


FIG. 9

This diagram shows a perspective view of a device assembly. It includes a base component (10) with a top surface (12). A rectangular plate (42) is positioned above the base. The plate has a front edge (80) and a rear edge (82). A curved, flexible member (54) is located between the plate and the base. Various other components are labeled with reference numerals, including 32, B, 44, 50, 52, 56, 58, 74, 82, 126, 130, 132, 134, 136, 128, 36, 38, and 48.

FIG. 10

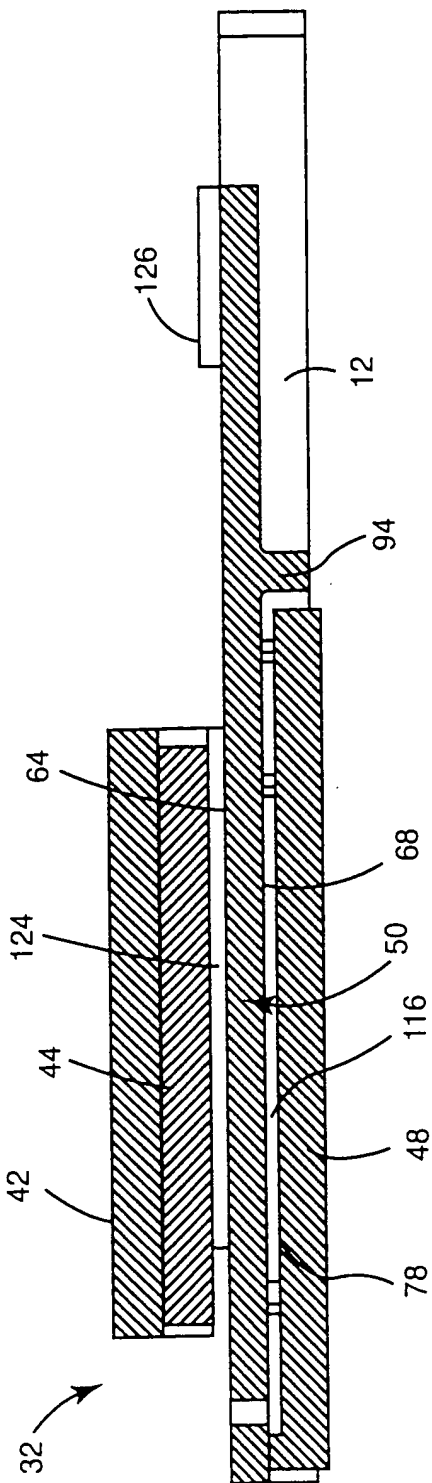


FIG. 11